


TOSHIBA RAV-BTP

TWIN

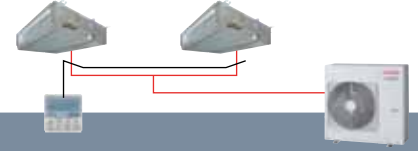

DIGITAL INVERTER	Nominaal koelvermogen		2 x 3,55	2 x 5,00	2 x 6,05	2 x 7,00	2 x 10,0	2 x 11,5
	Nominaal verwarmingsvermogen		2 x 4,00	2 x 5,60	2 x 6,40	2 x 8,00	2 x 11,2	2 x 13,5
	BUITENDEEL	RAV-	SM804ATP	SMI104ATP	SMI404ATP	SMI603AT	SM2244AT8	SM2804AT8
	Vermogensrange koelen	kW	1,5 - 7,4	3,0 - 11,2	3,0 - 13,2	3,0 - 16,0	9,8 - 22,4	9,8 - 27,0
	Vermogensrange verwarmen	kW	1,5 - 9,0	2,4 - 12,5	3,0 - 16,0	3,0 - 18,0	9,8 - 25,0	9,8 - 31,5
	Energielabel koelen/SEER		A/5,57**	B/5,00	C/2,74 (EER)	D/2,73 (EER)	C/2,81 (EER)	E/2,41 (EER)
	Energielabel verwarmen/SCOP		A/3,77	A+/4,14	B/3,61 (COP)	B/3,41 (COP)	B/3,50 (COP)	B/3,41 (COP)
	Jaarlijks energieverbruik koelen/verwarmen	kWh	-	699/2.568	-	-	-	-
	Geluidsdruk niveau koelen/verwarmen	dB(A)	42/44	47/48	48/49	45/47	50/51	51/52
	Afmetingen HxBxD	mm	550x780x290	890x900x320	890x900x320	1.340x900x320	1.540x900x320	1.540x900x320
	Gewicht	kg	44	68	68	99	134	134
	BINNENDEEL	RAV-	2 x SM406BTP	2 x SM566BTP	2 x SM806BTP	2 x SM806BTP	2 x SMI106BTP	2 x SMI406BTP
	Geluidsdruk niveau L-M-H ¹⁾	dB(A)	25-29-33	25-29-33	26-30-34	26-30-34	33-36-40	33-36-40
	Afmetingen HxBxD	mm	275x700x800	275x700x800	275x1.000x750	275x1.000x750	275x1.400x750	275x1.400x750
	Gewicht	kg	23	23	30	30	40	40
SUPER DIGITAL INVERTER	Nominaal koelvermogen		2 x 3,55	2 x 5,00	2 x 6,25	2 x 7,00		
	Nominaal verwarmingsvermogen		2 x 4,00	2 x 5,60	2 x 7,00	2 x 8,00		
	BUITENDEEL	RAV-	SP804ATP	SPI104ATP*	SPI404AT*	SPI604AT8		
	Vermogensrange koelen	kW	1,9 - 8,0	2,6 - 12,0	2,6 - 14,0	2,6 - 16,0		
	Vermogensrange verwarmen	kW	1,3 - 10,6	2,4 - 13,0	2,4 - 16,5	2,4 - 19,0		
	Energielabel koelen/SEER		A+/5,88	A+/5,65	A/3,26 (EER)	C/3,01 (EER)		
	Energielabel verwarmen/SCOP		A+/4,00	A/3,87	A/3,81 (COP)	B/3,48 (COP)		
	Jaarlijks energieverbruik koelen/verwarmen	kWh	423/2.448	619/3.906	-	-		
	Geluidsdruk niveau koelen/verwarmen	dB(A)	42/43	43/44	45/46	45/47		
	Afmetingen HxBxD	mm	890x900x320	1.340x900x320	1.340x900x320	1.340x900x320		
	Gewicht	kg	66	93	93	99		
	BINNENDEEL	RAV-	2 x SM406BT	2 x SM566BT	2 x SM806BT	2 x SM806BT		
	Geluidsdruk niveau L-M-H ¹⁾	dB(A)	25-29-33	25-29-33	26-30-34	26-30-34		
	Afmetingen HxBxD	mm	275x700x800	275x700x800	275x1.000x750	275x1.000x750		
	Gewicht	kg	23	23	30	30		

¹⁾Laag - Midden - Hoog *Ook leverbaar als 400I3-NI50 **Afgeleide waarden

TOSHIBA RAV-BTP



		TRIPLE				DOUBLE TWIN			
DIGITAL INVERTER	Nominaal koelvermogen	kW	3 x 3,33	3 x 4,10	3 x 4,67	3 x 6,67	3 x 7,67	4 x 5,00	4 x 5,75
	Nominaal verwarmingsvermogen	kW	3 x 3,73	3 x 4,67	3 x 5,33	3 x 7,47	3 x 9,00	4 x 5,6	4 x 6,75
	BUITENDEEL	RAV-	SMI104ATP	SMI1404ATP	SMI1603AT	SM2244AT8	SM2804AT8	SM2244AT8	SM2804AT8
	Vermogensrange koelen	kW	3,0 - 11,2	3,0 - 13,2	3,0 - 16,0	9,8 - 22,4	9,8 - 27,0	9,8 - 22,4	9,8 - 27,0
	Vermogensrange verwarmen	kW	3,0 - 13,0	3,0 - 16,0	3,0 - 18,0	9,8 - 25,0	9,8 - 31,5	9,8 - 25,0	9,8 - 31,5
	Energielabel koelen/EER		C/2,85	B/3,12	D/2,73	C/2,81	E/2,41	C/2,81	E/2,41
	Energielabel verwarmen/COP		C/3,23	A/3,61	B/3,41	B/3,50	B/3,41	B/3,50	B/3,41
	Geluidsrukniveau koelen/verwarmen	dB(A)	47/48	47/48	45/47	50/51	51/52	50/51	51/52
	Afmetingen HxBxD	mm	795x900x320	795x900x320	1.340x900x320	1.540x900x320	1.540x900x320	1.540x900x320	1.540x900x320
	Gewicht	kg	77	77	99	134	134	134	134
DIGITAL INVERTER	BINNENDEEL	RAV-	3 x SM406BTP	3 x SM566BTP	3 x SM566BTP	3 x SM806BTP	3 x SM806BTP	4 x SM566BTP	4 x SM806BTP
	Geluidsrukniveau L-M-H ¹⁾	dB(A)	25-29-33	25-29-33	25-29-33	26-30-34	26-30-34	25-29-33	26-30-34
	Afmetingen HxBxD	mm	275x700x750	275x700x750	275x700x750	275x1.000x750	275x1.000x750	275x700x750	275x1.000x750
	Gewicht	kg	23	23	23	30	30	23	30
	SUPER DIGITAL INVERTER	Nominaal koelvermogen	kW	3 x 3,33	3 x 4,17	3 x 4,67			
Nominaal verwarmingsvermogen		kW	3 x 3,73	3 x 4,67	3 x 5,33				
BUITENDEEL		RAV-	SPI104ATP*	SPI1404AT*	SPI1604AT8	-	-	-	-
Vermogensrange koelen		kW	2,6 - 12,0	2,6 - 14,0	2,6 - 16,0				
Vermogensrange verwarmen		kW	2,4 - 13,0	2,4 - 16,5	2,4 - 19,0				
Energielabel koelen/EER			A/3,41	A/3,60	B/3,01				
Energielabel verwarmen/COP			A/3,89	A/4,26	B/3,48				
Geluidsrukniveau koelen/verwarmen		dB(A)	43/44	45/46	45/47				
Afmetingen HxBxD		mm	1.340x900x320	1.340x900x320	1.340x900x320				
Gewicht		kg	93	93	95				
SUPER DIGITAL INVERTER	BINNENDEEL	RAV-	3 x SM406BTP	3 x SM566BTP	3 x SM566BTP	-	-	-	-
	Geluidsrukniveau L-M-H ¹⁾	dB(A)	25-29-33	25-29-33	25-29-33				
	Afmetingen HxBxD	mm	275x700x750	275x700x750	275x1.000x750				
	Gewicht	kg	23	23	23				

¹⁾Laag - Midden - Hoog *Ook leverbaar als 400I3-NI50